


AUTOMOTIVE SERVICE PRODUCTS

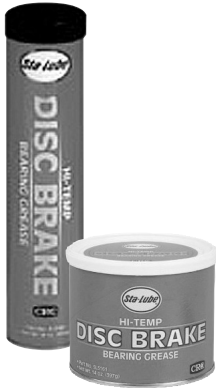

HEAVY DUTY DISC BRAKE WHEEL BEARING GREASE

The highest quality multi-purpose grease due to a lithium complex base providing for greater heat and water resistance. Operating temperature range of -10° to 350°F. Fortified with additives to resist rust, oxidation, extreme pressure and wear. Excellent water resistance. Designed for boat trailers, disc brake wheel bearings and more. NLGI Grade 2.

PART NO.	DESCRIPTION
3160	14 oz. cartridge Disc Brake Grease
3161	1 lb. (16 oz.) can Disc Brake Grease



MARINE AND TRAILER WHEEL BEARING GREASE

A high quality lithium based, multi purpose grease that performs well under a temperature range of 0° to 290°F. Highly water insoluble and washout resistant. Fully fortified with additives to protect against rust, oxidation, extreme pressure, and wear. A recommended leader for medium slow to medium high speed bearings and greased chassis points. NLGI Grade 1 1/2. USDA H2.

PART NO.	DESCRIPTION
3121	14 oz. can Marine Grease
3120	14 oz. cartridge Marine Grease
707L-1LB	1 Lb. Red Premium Wheel Bearing Grease
707L-4LB	4 Lb. Red Premium Wheel Bearing Grease
WL15	1 Lb. White Lithium Grease
8003	Pistol Grip Grease Gun
1142	Lever Action Grease Gun
65250	Universal Bearing Packer - Simply place the bearing between the plastic cones, tighten, and apply grease through the fitting on the end of the threaded shaft. Forces out old grease and evenly injects fresh grease. Cone diameter is 4 1/2"

PB BLASTER PENETRATING CATALYST

**Need to loosen a rusty bolt or stuck nut? Lubricate your garage door?
Restore engine performance on your car or lawn mower? Improve engine performance?
Nothing moves faster than Blaster.**

- Quickly breaks rusted joints and frozen parts free
- Powerful, concentrated penetrating catalyst
- Protects against further rust and corrosion
- Non-evaporating formula
- Saves time and equipment
- Uses include mechanical repairs, household maintenance, and plumbers aid
- The original bolt buster since 1957



PART NO.	DESCRIPTION
16PB	Blaster 11 oz. Penetrant - Spray Can - 12 per case
16PB-1	Blaster 11 oz. Penetrant - Spray Can - Single Can

AUTOMOTIVE SERVICE PRODUCTS



JOHNSEN'S PROFESSIONAL AUTO SERVICE CHEMICALS

PART NO.	DESCRIPTION	QUANTITY *
AC PRODUCTS		
6312	R134A Refrigerant 12 oz.	Case of 12
R134A	R134A Refrigerant 30 lb. Container	1 Cylinder
BATTERY		
4603	Battery Terminal Protector- Spray 10 oz.	12 per Case
BRAKE MAINTENANCE		
2212 *	DOT3 Brake Fluid 12 oz.	12 per Case
2232 *	DOT3 Brake Fluid Quart	12 per Case
2234 *	DOT3 Brake Fluid 1 Gal.	4 per Case
5012	DOT4 Brake Fluid 12 oz.	12 per Case
2417 *	Non-Chlorinated Brake Cleaner 14 oz.	12 per Case
2420	Brake Cleaner 18 oz.	12 per Case
CLEANERS		
4646	Glass Cleaner Spray - 19 oz.	12 per Case
4642	Carburetor Cleaner Spray 16.25 oz.	12 per Case
4644	Engine Degreaser Spray 16 oz.	12 per Case
FUEL ADDITIVES		
2962	Isopropyl Gas Line Anti-Freeze 12 oz.	12 per Case
4679	Gas Treatment - Carb Cleaner - 12 oz.	12 per Case
4684	Fuel Injection Cleaner 12 oz.	12 per Case
LUBRICANTS		
4602 *	Rust Penetrant 10 oz.	12 per Case
4603 *	Silicone Lubricant 10 oz.	12 per Case
4604 *	White Lithium Grease 10 oz.	12 per Case
OIL ADDITIVES		
4624 *	Oil Treatment - Reduces Burning 12 oz.	12 per Case
4625 *	Engine Oil Stop Leak 12 oz.	12 per Case
POWER STEERING		
2812	Power Steering Fluid 12 oz.	12 per Case
4610 *	Power Steering Fluid Quart	12 per Case
4611	Power Steering Fluid 1 Gal.	4 per Case
TIRE INFLATORS		
3912 *	Non-Flammable Flat Fix with hose- 13 oz.	12 per Case
WINTER DRIVING		
2962	Isopropyl Gas Line Anti-Freeze 12 oz.	12 per Case
5000	Diesel Fuel Conditioner 12 oz.	12 per Case
6732	Starting Fluid, 50% Eth., 7.2 oz.	12 per Case
6762 *	Starting Fluid, 25% Eth., 10.7 oz.	12 per Case

* Add (-1) to these part numbers for single unit quantity
(Example: 2212-1 is part # for one (1) 12oz. bottle of DOT3 brake fluid)



AUTOMOTIVE SERVICE PRODUCTS



21425

PERMATEX® FAST CURE EPOXY 21425

Convenient premeasured 10 - 4 g mixer cups in packed can epoxy mixer cups. No mess, no guess, no waste. Ideal for bonding glass, hard plastics, rubber and metal. Bonds in 5-15 minutes. Grey adhesive has excellent chemical resistance. Fills porosities and can be used to build up worn parts.

Suggested Applications: Loose trim, broken grilles, loose door glass channels & casting cracks & holes



24027

PERMATEX® SURFACE INSENSITIVE THREADLOCKER BLUE 24027

OEM specified. Medium/high strength thread-locker for general-purpose applications. Especially well-suited for 1/4" to 3/4" (6mm to 20mm) fasteners that have a slight oil film. Prevents vibration loosening. Oil resistant. Removable with hand tools for easy disassembly.

Suggested Applications: Rocker studs, rocker adjustment bolts and bolts on valve and cam covers, oil pans, disc brake calipers, intakes, alternators, and pulley assemblies 6 ML Tube (Carded)



24200

PERMATEX® MEDIUM STRENGTH THREADLOCKER BLUE 24200

OEM specified. All-purpose, medium strength threadlocker. Ideal for all nut and bolt applications 1/4" to 3/4" (6mm to 20mm). Eliminates need for stocking expensive lock nuts and lock washers. Locks and seals while preventing parts loosening due to vibration. Protects threads from corrosion. Removable with hand tools for easy disassembly.

Suggested Applications: Valve cover bolts, water pump bolts, oil pan bolts, drive shaft bolts, rocker arm adjustment nuts, carburetor studs 6 ML Tube (Carded)



27100

PERMATEX® HIGH STRENGTH THREADLOCKER RED 27100

OEM specified. High strength threadlocker for heavy-duty applications 3/8 inch to 1 inch (10mm to 25mm). Especially well-suited for permanently locking studs and press fits. Adds 3,000 PSI holding power on slip and press fit assemblies. Replaces set screws and snap rings. Locks against vibration loosening. May require heat or special tools for removal.

Suggested Applications: Cylinder block and rocker arm studs, ring gear bolts, frame bolts, shock absorber bolts 6 ML Tube (Carded)



27200

PERMATEX® HIGH TEMPERATURE THREADLOCKER RED 27200

OEM specified. High temperature/high strength threadlocker for heavy-duty applications. Prevents bolts and press fits 3/8" to 1" (10mm to 25mm) from loosening due to shock, severe vibration and heat stress. Exclusive formulation for newer engines and high performance applications that require extreme temperature resistance.

Suited for temperatures up to 450 F (232 C). Removable with heat and hand tools. 10 ML. Bottle

AUTOMOTIVE SERVICE PRODUCTS



80078

PERMATEX® ANTI-SEIZE LUBRICANT 80078

A highly refined blend of aluminum, copper and graphite lubricants. Use during assembly to prevent galling, corrosion and seizing and to assure easier disassembly. Temperature range: -60 F to 1600 F (-51 C to 871 C). Salt, corrosion and moisture resistant and ideal for marine use. Non-aerosol version meets Mil Spec #907E. Aerosol - Level 3 8 Oz.. Bottle

Suggested Applications: For easy removal of spark plugs, cylinder head and exhaust head bolts.



31163

PERMATEX® COPPER ANTI-SEIZE LUBRICANT 31163

A premium quality copper anti-seize and thread lubricant that may be used to prevent seizing, corrosion and galling where high temperature conditions exist. Contains a high percentage of micro-fine copper flakes in a semi-synthetic grease carrier and is fortified with high quality rust and corrosion inhibitors. Temperature range: -30 F to 1800 F (-34 C to 982 C). Provides good electrical conductivity. Meets Mil Spec #907E. 16 Oz. Brush-Top Bottle

Suggested Applications: Spark plug threads installed in aluminum, exhaust manifold bolts, engine bolts, oxygen sensors, knock sensors, thermostat housing bolts, fuel filter fittings, & battery cable connections



80065

PERMATEX® HIGH TACK SPRAY-A-GASKET SEALANT 80065

Fast-drying all-purpose sealant dries to a highly tacky, non-brittle film. A reliable general adhesive. Remains effective under temperatures of -65 F to 500 F (-54 C to 260 C). Resists gasoline, oil, antifreeze, axle lube, kerosene, propane and butane. Level 3 12 Oz. Aerosol

Suggested Applications: Valve covers, fuel pumps, carburetors, manifold gaskets; seals all felt, cork, metal, paper, rubber and asbestos gaskets



81724

PERMATEX® ULTRA BLUE RTV SILICONE GASKET MAKER 81724

OEM specified. Permatex Ultra silicones were developed to meet today's technology changes. Sensor-safe, low odor, noncorrosive. Outstanding oil resistance and joint movement values. Eight times more flexible than cork/composite gaskets; three times more oil resistant than conventional silicones. 3.35 Oz. Tube

Temperature range -65 F to 500 F (-54 C to 260 C) intermittent; resists auto & shop fluids & vibration.

Suggested Applications: Valve covers, oil pans, timing covers, transmission pans, differential covers



81160

PERMATEX® HIGH-TEMP RED RTV SILICONE GASKET 81160

OEM specified. Formulated for hi-temp applications, or heavy-duty use (such as towing, etc.). Replaces almost any cut gasket by making reliable formed-in-place gaskets that resist cracking, shrinking and migrating caused by thermal cycling. Coats pre-cut gaskets to increase reliability. Temperature range -65 F to 650 F (-54 C to 343 C) intermittent; resists auto and shop fluids. First generation 1970-1980 gasket maker. 8 Oz. Tube

Suggested Applications: Valve covers, oil pans, timing covers, water pumps, thermostat housings, transmission pans



82180

PERMATEX® ULTRA BLACK MAXIMUM OIL RESISTANCE RTV SILICONE GASKET MAKER 82180

OEM specified. For dealership warranty requirements, ensures extended drivetrain warranty compliance. Fast-curing formula. Sensor safe, low odor, noncorrosive. Meets performance specs of OE silicone gaskets. Retains high flexibility, oil resistance properties through use of a patented adhesion system. Temp. range -65 F to 500 F (-54 C to 260 C) intermittent; resists auto & shop fluids and vibration. 3.35 Oz. Tube

AUTOMOTIVE SERVICE PRODUCTS



81158

PERMATEX® BLACK SILICONE ADHESIVE SEALANT 81158

General-purpose, black RTV indoor/outdoor sealant. Seals, bonds, repairs, mends and secures glass, metal, plastics, fabric, vinyl, weather stripping and vinyl tops. Protects and repairs electrical wiring. May be applied to horizontal or vertical surfaces. Waterproof and flexible. Temperature range -75°F to 450°F (-59°C to 232°C); resists oil, water, weather, vibration, grease.

Suggested Applications: Windshields, door frames, electrical connections, seams and roofs, vinyl tops, weather stripping



80646

PERMATEX® GASKET REMOVER 80646

Quickly removes all non-silicone gasketing adhesives and sealants, even baked-on gaskets. Removes gaskets from any type of assembly in 10 to 12 minutes. Prepares metal parts for new gasket maker and assembly. Reduces scraping and sanding. Prevents damage to flanges. Level 2

Suggested Applications: Removes solvent-based sealants, baked-on gaskets, weatherstrip adhesive, dried oil, grease and paint



80077

PERMATEX® DISC BRAKE QUIET 80077

Stops brake squeal by dampening vibration at caliper/brake pad interface. Provides tighter fit and allows for easier disassembly. Protects against corrosion. Compatible with anti-lock brake systems. This product contains an elastomeric polymer for use with brake pads not having anti-squeal shims. Aerosol – Level 3*

Suggested Applications: Automotive disc brakes, outboard and inboard pads for disc braking systems, disc brake pads without anti-squeal shims



81844

PERMATEX® REARVIEW MIRROR ADHESIVE 81844

Approved and used by GM, Ford and DaimlerChrysler. Permanently remounts mirrors to windshields. Achieves handling strength in seconds; mirror-mounting strength in 15 minutes. Available in single and multi-applications. ODC-free.

Suggested Applications: Mounting rearview mirrors to windshields



82190

PERMATEX® SUPER GLUE 82190

This formulation was specially designed for a faster, long-lasting bond. It is easily applied and works on nonporous materials including metal, plastics, rubber, vinyl, paper, wood, textiles, and cork gaskets. Permanent transparent bond fills gaps to .004".

Suggested Applications: Automotive trim, logos, knobs, gear shift logos, minor interior repairs



3M AUTOMOTIVE ATTACHMENT TAPE, #06377 GRAY, 1/2 IN X 20 YDS, 30 MIL

Unique, low VOC aerosol product designed to dissolve the deposits that are normally found on the throttle plate in fuel injected cars. It both cleans and lubricates, while restoring performance



3M THROTTLE PLATE AND CARB CLEANER #08866 8.5 OZ NET WT

Unique, low VOC aerosol product designed to dissolve the deposits that are normally found on the throttle plate in fuel injected cars. It both cleans and lubricates, while restoring performance



SCOTCH FILAMENT TAPE #06894 18 MM X 55 M

Excellent for bundling elongated metal and wood parts and for sealing and reinforcing cartons containing heavy items for shipment. Strong - High performance - Adheres instantly. Tensile strength is 380 lbs./inch



3M SILICONE PASTE #08946 8 OZ NET WT

A non-melting, water resistant, 100% solids, silicone compound designed to protect surfaces from oxidation. Also used as a general purpose lubricant for brakes (metal to rubber applications); great for O rings and weather-stripping.



SCOTCH PERFORMANCE MASKING TAPE #26340 GREEN, 8 MM X 55 M

Highly conformable, provides the best adhesive transfer resistance, hugs curves, contours and provides outstanding paint lines. Goes on quickly and easily, sticks at a touch and stays put. Perfectly balanced to give outstanding masking results.



3M WINDOW-WELD ROUND RIBBON SEALER #08610 1/4 IN X 15 FT KIT

Contains one roll of sealer and setting blocks. Its unique feature of controlled compressibility allows easy installation yet will not squeeze out or allow lite to contact pinchweld. Sufficient material to replace one windshield or backlite



TARTAN VINYL ELECTRICAL TAPE #49656 3/4 IN X 60 FT

General purpose electrical insulating tape. Economical and durable with excellent resistance to a wide range of contaminants and weather conditions.



SCOTCH-BRITE ROLOC SURFACE CONDITIONING DISCS 25 DISCS PER BOX

#07480 - 2 IN, COARSE,
#07480 - 3 IN, COARSE,

Offers ease of disc centering and is used in conjunction with 3M Roloc Disc Pad Assembly 05539



SCOTCH PREMIUM HEAVY DUTY PACKAGING TAPE 48 MM X 50 M CLEAR #45287 TAN #39524

This reusable dispenser makes it extremely convenient to use in a variety of locations without making an investment in extra dispensers



3M HEAT SHRINK TUBING 10 PACKS PER CASE

#36618, 3/32 IN X 6 IN
#36619, 1/8 IN X 6 IN
#36620, 3/16 IN X 6 IN
#36621, 1/4 IN X 6 IN

Flexible polyolefin tubing that offers an outstanding balance of electrical, physical and chemical properties for a wide variety of applications. Assortment contains 3 each of the 7 colors.



3M DUCT TAPE - SILVER #06969 48 MM X 54.8 M

A general purpose cloth tape designed for non-critical applications such as sealing, bundling, and holding, and various other applications.

AUTOMOTIVE SERVICE PRODUCTS

AUTO AND TRUCK SERVICE SUPPLIES POPULAR ITEMS

BRAKE CLEANER

Item #	Description	Size	Qty/Cs
2417	Johnsen's Non-Chlor. VOC Compliant	14oz	12
2420	Johnsen's Non-Flam. VOC Compliant	18oz	12

BRAKE FLUID

Item #	Description	Size	Qty/Cs
2212	Johnsen's DOT 3 Heavy Duty	12oz	12
2232	Johnsen's DOT 3 Heavy Duty	1 Qt	12
2234	Johnsen's DOT 3 Heavy Duty	1 Gal	4
5012	Johnsen's Dot 4 Premium	12oz	12

POWER STEERING FLUID

Item #	Description	Size	Qty/Cs
2812	Johnsen's Power Steer Fluid, Regular	12oz	12
4610	Johnsen's Power Steer Fluid, Regular	1 Qt	12

GAS AND OIL PRODUCTS

Item #	Description	Size	Qty/Cs
4610	Johnsen's Oil Treatment	12oz	12
4625	Johnsen's Engine Stop Leak	12oz	12
4679	Johnsen's Gasoline Treatment	12oz	12
4684	Johnsen's Fuel Injector Cleaner	12oz	12
4642	Johnsen's Carb. Spray Cleaner	16.25oz	12
08866	3-M Throttle / Carb Spray Cleaner	8.5oz	6/pk

WINTER PRODUCTS

Item #	Description	Size	Qty/Cs
2962	Johnsen's Isopropyl Gas Antifreeze	12oz	12
6732	Johnsen's Start Fluid - 50% Ether	7.2oz	12
6762	Johnsen's Start Fluid - 25% Ether	10.7oz	12

LUBRICANTS

Item #	Description	Size	Qty/Cs
4644	Johnsen's Engine Degrease Spray	16oz	12
PBBlaster	Rust Penetrant Spray	11oz	12
4602	Johnsen's Rust Penetrant Spray	10oz	12
4603	Johnsen's Silicone Spray	10oz	12
4604	Johnsen's White Lithium Grease Spray	11oz	12
00116	LPS1 Greaseless Spray	11oz	12
00416	LPS Electro-Contact Cleaner	16oz	12

GLASS CLEANER / WASHER FLUID

Item #	Description	Size	Qty/Cs
2943	Windshield Wash Concentrate	16oz	12
91164	Stoner Invisible Glass Spray (Tint Safe)	19oz	6/pk
4646	Johnsen's Glass CleanSpray (Tint Safe)	19oz	12

AUTO AND TRUCK CLEAN/SHINE

Item #	Description	Size	Qty/Cs
91144	Stoner Carpet/Upholstry Spray Clean	18oz	12
LFTCSR	Spray Carpet Stain Remover	oz	6/pk
LFTUSR	Spray Upholstery Stain Remover	oz	6/pk
91154	Stoner Tarminator Tar/Sap Remover	oz	6/pk
94213	Stoner XENIT Cleaner/Remover	10oz	6/pk
91034	Stoner Trim-Shine Spray	12oz	6/pk
91354	Stoner Speed-Bead Wax Spray	15oz	6/pk

ADHESIVES / SEALANTS

Item #	Description	Size	Qty/Cs
81158	Permatex Black Silicone, Tube	3 oz	4/pk
81160	Permatex Hi-Temp Red Silicone, Tube	3 oz	4/pk
82194	Permatex Ultra-Gray Gasket Maker	3.5 oz	4/pk
81844	Permatex Rear-View Mirror Adhesive	2 part	4/pk
08610	3-M Window Ribbon Sealer 1/4"	15' kit	1
06377	3-M Auto. Attach Tape, Gray 1/2"	20 yds	1

SURFACE CONDITIONING DISCS

Item #	Description	Size	Qty/Cs
07480	3-M 2 inch Course ROLOC Discs	2 in.	25/bx
07485	3-M 3 inch Course ROLOC Discs	3 in.	25/bx

SHOP SUPPLIES

Item #	Description	Qty/Cs
50WT	50 Watt Rough Service Bulbs	4/pk
75WT	75 Watt Rough Service Bulbs	4/pk
RAZBLA	100 Pack Razor Blades	100/pk
3825HD	Air Hose 25' - 3/8" Male Ends	1
3850HD	Air Hose 50' - 3/8" Male Ends	1
SL935	Rough Duty Flourescent Work Light 25' Cord	1

BATTERY SERVICE

Item #	Description	Qty/Cs
00369	Battery Top Post	10/cd
00192	Battery Side Terminal	10/cd
7420	Acid Brush	6/pk
ARJ104	12V Portable Battery Jump Starter	1

WIPER BLADES

Item #	Description	Size	Qty/Cs
18A	Saver 18" Sure Fit Blade	18"	10
19A	Saver 19" Sure Fit Blade	19"	10
20A	Saver 20" Sure Fit Blade	20"	10
21A	Saver 21" Sure Fit Blade	21"	10
22A	Saver 22" Sure Fit Blade	22"	10
252-18	Saver 18" Winter Blade	18"	10
252-19	Saver 19" Winter Blade	19"	10
252-20	Saver 20" Winter Blade	20"	10
252-21	Saver 21" Winter Blade	21"	10
252-22	Saver 22" Winter Blade	22"	10

LICENSE PLATE SCREWS

Item #	Description	Qty/Cs
12324	M6 x 20 License Plate Screws	100/bx
14-3/4	#14 x 3/4" License Plate Screws	100/bx

OE REPLACEMENT LUG NUTS

Item #	Description	Qty/Cs
5844	12mmx1.25 OE Nut - 21mm Hex	100/bx
5845	12mmx1.50 OE Nut - 19mm Hex	100/bx
5580R	7/16" OE Nut - 3/4" Hex	100/bx
5581R	1/2" OE Nut - 3/4" Hex	100/bx
5586R	1/2" OE Nut - 13/16" Hex	100/bx

REPLACEMENT AUTO BULBS

Item #	Description	Qty/Cs
9004	Halogen Hi-Lo Beam	10/bx
1157	Stop/Turn/Tail Bulb	10/bx

